# 3.0 GHz DIVIDE BY 4 PRESCALER


### FEATURES

NE

HIGH FREQUENCY OPERATION TO 3 GHz

- FIXED DIVIDE RATIO: ÷ 4
- LOW CURRENT CONSUMPTION: 15 mA @ 5 V
- SMALL PACKAGE: 8 PIN SSOP
- AVAILABLE IN TAPE AND REEL

#### TEST CIRCUIT

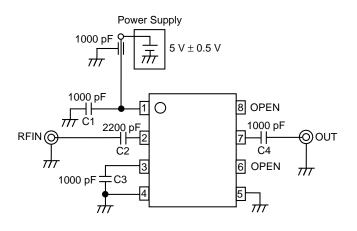

**UPB1510GV** 

## DESCRIPTION

The UPB1510GV is a Silicon MMIC digital prescaler manufactured with the NESAT<sup>TM</sup> IV silicon bipolar process. It features frequency response to 3 GHz, a divide-by-four ratio, and operates on a 5 volt supply while drawing only 15 mA. The device is housed in a small 8 pin SSOP package that contributes to system miniaturization. The low power consumption and wide frequency operation makes the device well suited for use in a PLL synthesizer for UHF/VHF TV and DBS tuner applications.

#### **ELECTRICAL CHARACTERISTICS** (TA = -40 to +85°C, Vcc = 4.5 to 5.5 V, Zs = ZL = 50 $\Omega$ )

PART NUMBER PACKAGE OUTLINE			UPB1510GV \$08		
SYMBOLS	PARAMETERS AND CONDITIONS	UNITS	MIN TYP MAX		
lcc	Circuit Current, No Input Signal	mA		15	
fin (u)1	Upper Limit Operating Frequency 1, PIN = -10 to +6 dBm	GHz	3.0		
fin (u)2	Upper Limit Operating Frequency 2, PIN = -15 to +6 dBm	GHz	2.7		
fin (L)	Lower Limit Operating Frequency, PIN = -15 to +6 dBm	GHz			0.5
PIN1	Input Power 1, fin = 2.7 to 3.0 GHz	dBm	-10		+6
PIN2	Input Power 2, fin = 1.0 to 2.7 GHz	dBm	-15		+6
Pout	Output Power, PIN = 0 dBm, fIN = 2.0 GHz	dBm	-12	-7	

## ABSOLUTE MAXIMUM RATINGS<sup>1</sup> (TA = 25°C)

SYMBOLS	PARAMETERS	UNITS	RATINGS
Vcc	Supply Voltage	V	6.0
Vin	Input Voltage	V	6.0
PD	Total Power Dissipation <sup>2</sup>	mW	250
TA	Operating Ambient Temp.	°C	-40 to +85
Tstg	Storage Temperature	°C	-55 to +150

#### Notes:

1. Operation in excess of any one of these parameters may result in permanent damage.

 Mounted on a double-sided copper clad 50x50x1.6 mm epoxy glass PWB (T<sub>A</sub> = +85°C).


## **PRODUCT LINE-UP**

Product No.	Icc (mA)	Vcc (V)	÷4 fin (GHz)	Package
UPB585G	18	4.5 to 5.5	0.5 to 2.5	8 pin SOP
UPB1510GV	15	4.5 to 5.5	0.5 to 3.0	8 pin SSOP

Note: This table shows typical values only.

## SYSTEM APPLICATION EXAMPLE

#### RF UNIT BLOCK OF DBS TUNER

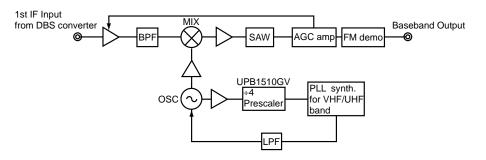


## **PIN DESCRIPTIONS**

Pin No.	Symbol	Applied Voltage	Description
1	VCC	4.5 to 5.5	Power supply pin. This pin must be decoupled with a bypass capacitor (e.g . 1000 pF).
2	IN	-	Signal input pin. This pin should be coupled to source with a capacitor (e.g. 1000 pF).
3	ĪN	-	Signal input bypass pin. This pin must be equipped with a bypass capacitor (e.g. 1000 pF) to ground.
4	GND	0	Ground pin. Ground pattern on the board should be formed as wide as possible to minimize ground impedance.
5	GND	0	
6	NC	_	No connection, this pin should be left open.
7	OUT	-	Divided frequency output pin. This pin is designed as an emitter follower output, and should be coupled to the load with a capacitor (e.g. 1000 pF).
8	NC	_	No connection, this pin should be left open.

## RECOMMENDED OPERATING CONDITIONS


SYMBOL	PARAMETER	UNITS	MIN	ТҮР	МАХ
Vcc	Supply Voltage	V	4.5	5.0	5.5
TA	Operating Ambient Temp.	°C	-40	+25	+85

## **INTERNAL BLOCK DIAGRAM**



### OUTLINE DIMENSIONS (Units in mm)

#### PACKAGE OUTLINE S08

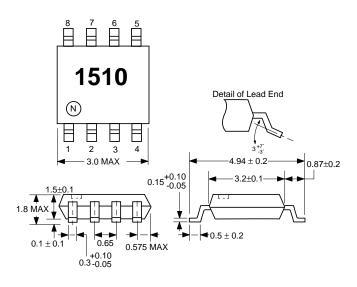

1	0	8
2		7
3		6
4		5

PIN CONNECTIONS			
1. Vcc	5. GND		
2. IN	6. NC		
3. IN	7. OUT		
4. GND	8. NC		

#### **ORDERING INFORMATION**

PART NUMBER	QUANTITY
UPB1510GV-E1	1000/Reel

Note:

1. Embossed tape 8 mm wide.

Pin 1 is in the tape pull-out direction.

PRINTED IN USA ON RECYCLED PAPER -10/97

# **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

CEL: UPB1510GV-EVAL