

# Miniature Ceramic Fixed Attenuator

50Ω 1W 6dB DC to 7000 MHz

**PAT-6+**  
**PAT-6**



## Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C

## Pin Connections

INPUT	1
OUTPUT	3
GROUND	2,4

## Features

- wideband, DC to 7000 MHz
- excellent VSWR, through entire band
- miniature size
- aqueous washable

## Applications

- power leveling
- impedance match improvement

CASE STYLE: AF320  
PRICE: \$2.95 ea. QTY (10-49)

**+ RoHS compliant in accordance  
with EU Directive (2002/95/EC)**


*The +Suffix identifies RoHS Compliance. See our web site  
for RoHS Compliance methodologies and qualifications.*

## Electrical Specifications at 25°C

FREQ. RANGE (MHz)	ATTENUATION (dB) Flatness, Max.	VSWR (:1) Max.			MAX. INPUT POWER (W)
		DC-1 GHz	DC-2.5 GHz	DC-f <sub>u</sub> GHz	
f <sub>L</sub> -f <sub>u</sub>	Norm.	DC-1 GHz	DC-2.5 GHz	DC-f <sub>u</sub> GHz	
DC-7000	6±0.3	0.3	0.5	1.1	1.2
		1.2	1.3	1.4	1

1. RF power at 25°C case temperature: 1 Watt. Derate linearly to 0.1 Watt at 100°C.


## Outline Drawing

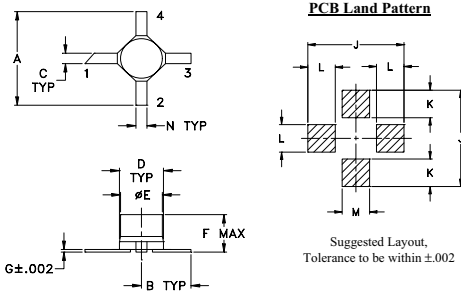

## Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.200	.100	.020	.070	.068	.057	.005
5.08	2.54	0.51	1.78	1.73	1.45	0.13
H	J	K	L	M	N	wt
--	.230	.065	.060	.080	.040	grams
--	5.84	1.65	1.52	2.03	1.02	0.04

## Demo Board MCL P/N: TB-319 Suggested PCB Layout (PL-208)

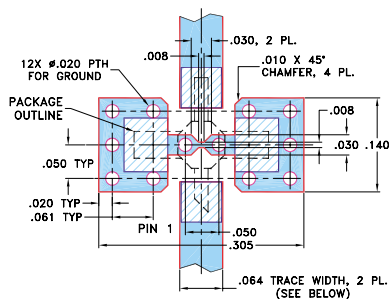



### NOTES:

1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

## Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
50.00	6.08	1.04
796.25	6.18	1.07
1542.50	6.29	1.09
2288.75	6.35	1.10
3035.00	6.57	1.12
3781.25	6.48	1.12
4527.50	6.50	1.11
5273.75	6.62	1.09
6020.00	6.81	1.11
7015.00	7.08	1.20

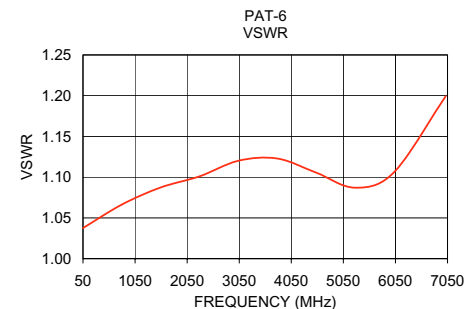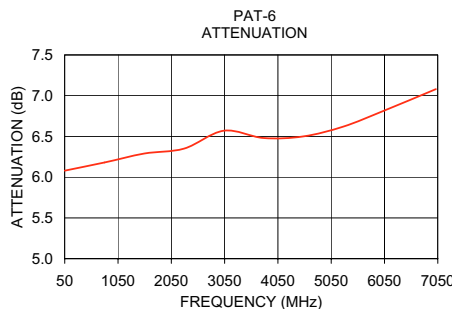

designers kit available

Kit No.	No. of Units in Kit	Description	Price \$ per Kit
K1-PAT	20	4 of ea. PAT-3(+),6(+),10(+),15(+)	49.95